

PRODUCT DATASHEET

TRUSYS UNIV P 73W 840 VW OP PS

TRUSYS UNIVERSAL | The solution for refurbishment - universal fitting to existing trunking luminaire system



Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Industry halls, high rack warehouse, hardware stores
- Discounters, supermarkets

Product benefits

- The solution for refurbishment: universal fitting to existing trunking luminaire system
- Easy installation, no tools required for connection
- Energy saving and cost-effective
- Flexible application due to a range of different lumen packages and beam angles

Product features

- Multi Lumen function: power steps selectable
- Beam angles: 120° (VW), 90° (W), 60° (N), 30° (VN)
- Click into place solution with smart click buttons
- Luminous efficacy: up to 185 lm/W
- Lifetime (L80/B10): up to 100,000 h (at 25 °C)
- Initial color consistency: ≤ 3 SDCM




TECHNICAL DATA

Electrical data


Nominal wattage	73 W / 66 W / 57 W / 49 W / 41 W
Nominal voltage	220...240 V
Mains frequency	0/50/60 Hz
Nominal current	73mA / 66mA / 57mA / 49mA / 41 mA
Inrush current	25.5 A
Inrush current time T_{h50}	302 μ s
Max. number of luminaires per miniature circuit breaker B16	8
Max. number of luminaires per miniature circuit breaker C10	8
Max. number of luminaires per miniature circuit breaker C16	14
Power factor λ	≥ 0.90
Total harmonic distortion	< 15 %
Protection class	I
Operating mode	Integrated LED driver

Photometrical data

Luminous flux	11900 lm / 10890 lm / 9575 lm / 8230 lm / 6890 lm
Luminous efficacy	163 lm/W / 165 lm/W / 168 lm/W
Color temperature	4000 K
Light color (designation)	Cool White
Color rendering index Ra	> 80
Standard deviation of color matching	< 3 sdc _{cm}
Low flicker	Yes
Flickering metric (Pst LM)	<1
Stroboscope effect metric (SVM)	<0.4
Photobiological safety group acc. to EN62778	RG1
Beam angle	120 °

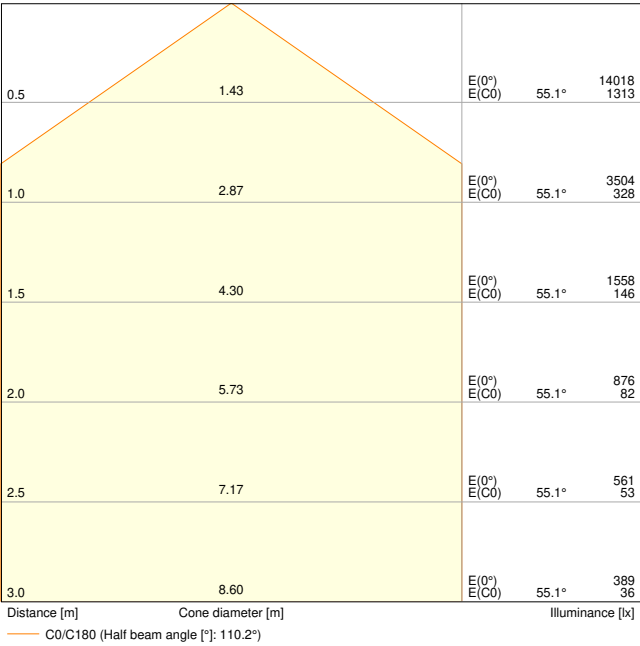

TRUSYS UNIV P 73W 840 VW OP PS

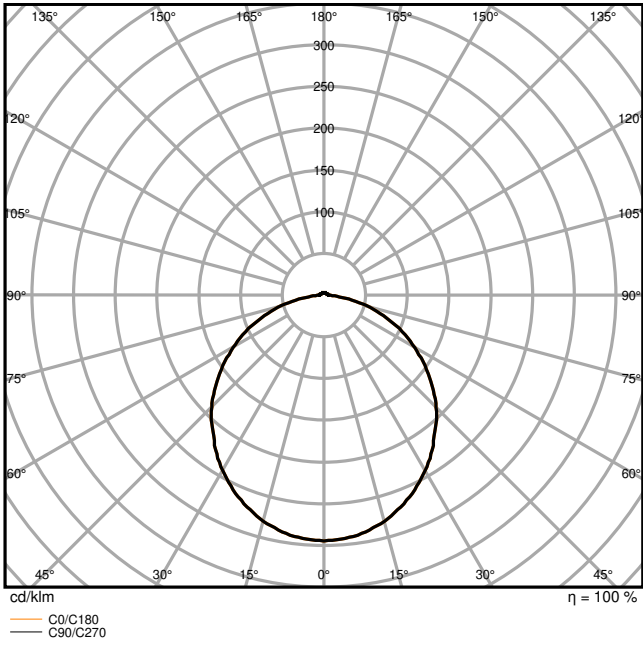


TRUSYS UNIV P 73W 840 VW OP PS

Adjustable attributes

Nominal wattage	Color temperature	Luminous flux	Luminous efficacy
73 W	4000 K	11900 lm	163 lm/W
66 W	4000 K	10890 lm	165 lm/W
57 W	4000 K	9575 lm	168 lm/W
49 W	4000 K	8230 lm	168 lm/W
41 W	4000 K	6890 lm	168 lm/W

Dimensions & Weight

Length	1504.00 mm
Width	68.00 mm
Height	35.00 mm
Product weight	1590.00 g



TRUSYS UNIVERSAL OPAL

Materials & Colors

Product color	White
Housing color	White
RAL Color (most similar)	RAL 9003
Body material	Aluminum
Cover material	Polycarbonate (PC)
Light emitting surface material	Polycarbonate (PC)
Glow Wire Test according to IEC 60695-2-12	650 °C
Mercury content	0.0 mg

Application & Mounting

Ambient temperature range	-20...+40 °C
Temperature range at storage	-40...+80 °C
Type of connection	Plug-In connection
Type of protection	IP20
Protection class IK (shock resistance)	IK02
Dimmable	No
Mounting type	Surface/Suspended
Mounting location	Mounting rail
Application environment	Indoor
Adjustable	No
With light source	Yes
Replaceable light source	No

Lifespan

Lifespan L70/B50 at 25 °C	120000 h ¹⁾
Lifespan L80/B10 at 25 °C	100000 h ¹⁾
Lifespan L90/B10 at 25 °C	54000 h
Number of switching cycles	50000

1) t[h]: L70 / B50 @ 25 °C (Ta), t[h]: L80 / B10 @ 25 °C (Ta), t[h]: L90 / B10 @ 25 °C (Ta)

Control gear

Output current	450mA / 400mA / 350mA / 300mA / 250 mA
ECG - Output ripple current	< 5 %

Emergency lighting

Type of Emergency Lighting (EL)	EL certified driver (0Hz / DC operation) for central battery operation included
Type of emergency operation test	None
Wattage in emergency operation mode	73 W
Luminous flux in emergency operation mode	11900 lm

Certificates & Standards

Standards	CE / CB / UKCA / ENEC / TÜV / EAC
Luminaire with limited surface temperature, "D sign"	No
Ball shot safe	No
Replaceable light source (EPREL)	Not replaceable

Additional product data

Added function	MULTI SELECT
----------------	--------------

EQUIPMENT / ACCESSORIES

– Various accessories available

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	UI TRUSYS UNIVERSAL
	Legal information	Informationstext 18 Abs 4 ElektroG



Documents and certificates		Document name
	Legal information	Legal insert
	Legal information	Safety Insert G11205497
	Declarations of conformity	CE declaration TRUSYS UNIVERSAL
	Declarations of conformity UKCA	UKCA declaration TRUSYS UNIVERSAL
Photometric and lighting design files		Document name
	IES file (IES)	TRUSYS UNIV P 73W 840 VW OP PS
	LDT file (Eulumdat)	TRUSYS UNIV P 73W 840 VW OP PS
	UGR file (UGR table)	TRUSYS UNIV P 73W 840 VW OP PS
	Light distribution curve type cone	TRUSYS UNIV P 73W 840 VW OP PS
	Light distribution curve type polar	TRUSYS UNIV P 73W 840 VW OP PS
CAD/BIM files		Document name
	BIM Revit 3D	TruSys Universal
	CAD STEP 3D	TRUSYS UNIV OP
Tender texts		Document name
	Tender documents	TRUSYS UNIVERSAL 73W 840 VW OP PS -en

LOGISTICAL DATA


Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854496806	Folding box 1	80 mm x 1,525 mm x 93 mm	1920.00 g	11.35 dm ³
4099854496813	Shipping box 4	1,545 mm x 335 mm x 122 mm	9260.00 g	63.14 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

ADDITIONAL CATALOG INFORMATION



TruSys UNIVERSAL 50W ON/OFF




W	LM	1	2	3
20W	3700	—	—	—
30W	5550	—	ON	—
40W	7400	—	ON	ON
50W	9000	—	ON	ON

TruSys UNIVERSAL 73W ON/OFF



W	LM	1	2	3	4
41W	7380	—	—	—	ON
49W	8720	—	—	ON	—
57W	10030	—	ON	—	—
66W	11420	ON	—	—	—
73W	12400	—	—	—	—

1x TRUSYS UNIV	2x TRUSYS UNIV	3x TRUSYS UNIV
CRI A	CRI A	CRI A
13	14	15
14	15	16
15	16	17
16	17	18
17	18	19
18	19	20
19	20	21
20	21	22
21	22	23
22	23	24
23	24	25
24	25	26
25	26	27
26	27	28
27	28	29
28	29	30
29	30	31
30	31	32
31	32	33
32	33	34
33	34	35
34	35	36
35	36	37
36	37	38
37	38	39
38	39	40
39	40	41
40	41	42
41	42	43
42	43	44
43	44	45
44	45	46
45	46	47
46	47	48
47	48	49
48	49	50
49	50	51
50	51	52
51	52	53
52	53	54
53	54	55
54	55	56
55	56	57
56	57	58
57	58	59
58	59	60
59	60	61
60	61	62
61	62	63
62	63	64
63	64	65
64	65	66
65	66	67
66	67	68
67	68	69
68	69	70
69	70	71
70	71	72
71	72	73
72	73	74
73	74	75
74	75	76
75	76	77
76	77	78
77	78	79
78	79	80
79	80	81
80	81	82
81	82	83
82	83	84
83	84	85
84	85	86
85	86	87
86	87	88
87	88	89
88	89	90
89	90	91
90	91	92
91	92	93
92	93	94
93	94	95
94	95	96
95	96	97
96	97	98
97	98	99
98	99	100



References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.