

PRODUCT DATASHEET

LISOEV 1465x31 28 23W 930 S130

LINEAR INDIVIDUAL LIGHT SOURCES INDIRECT | Upgrade or replacement light source unit for indirect, diffuse light distribution



Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, education, public buildings

Product benefits

- Easy upgradeability of light source and driver (EVERLOOP design)
- Easy installation, no tools required for connection
- Homogenous light distribution and reduced glare ($UGR \leq 19$) thanks to IndiviLED® optics
- High performance with CRI90

Product features

- Indirect, diffuse light distribution
- Lifetime (L80/B10): 70,000 h (at 25 °C)
- Beam angle: 90°


TECHNICAL DATA

Electrical data


Nominal wattage	23.00 W
Nominal voltage	45 V
Nominal current	466.000 mA

Photometrical data

Luminous flux	2850 lm
Luminous efficacy	123 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	≥90
Standard deviation of color matching	3 sdc _{cm}
Flickering metric (Pst LM)	≤1
Stroboscope effect metric (SVM)	≤0.4
Photobiological safety group acc. to EN62778	RG1
Beam angle	130 °
UGR	19

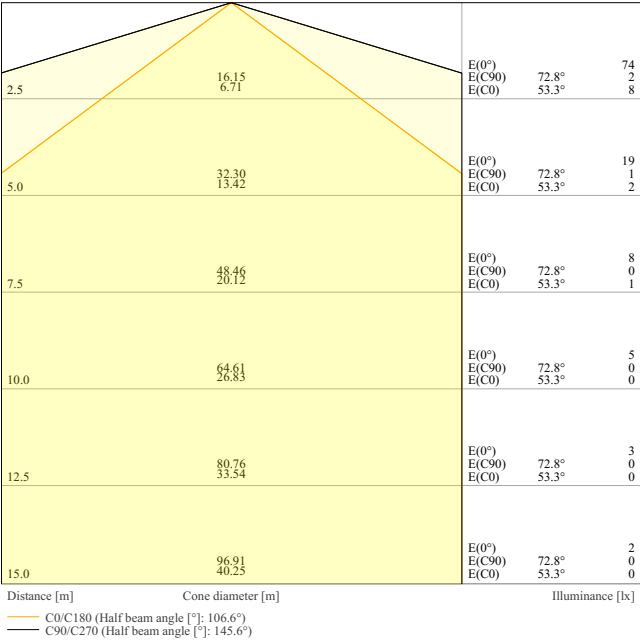

LISOEV 1465X31 28 23W 930 S130 LEDV 466mA

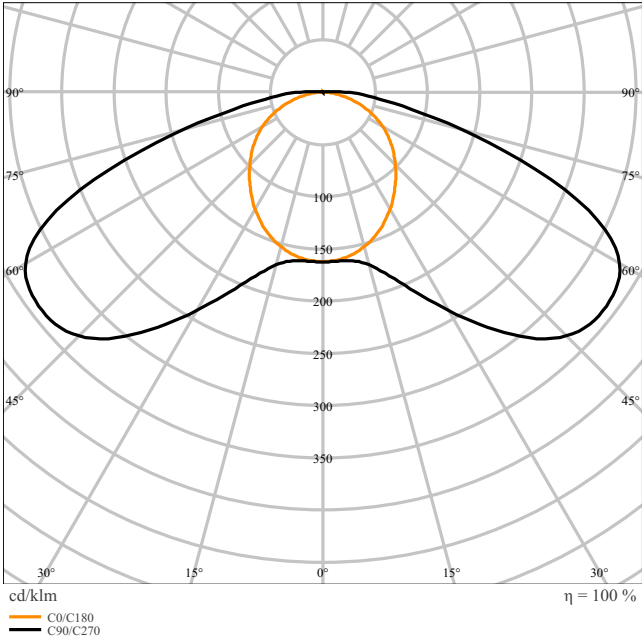

LISOEV 1465X31 28 23W 930 S130 LEDV 466mA

Dimensions & Weight

Length	1465.00 mm
--------	------------

Width	31.00 mm
Height	11.00 mm
Product weight	337.00 g
Cable length	100.000



1 5m INDIRECT LED MODULE

Materials & Colors

Product color	Grey
Housing color	Grey

Application & Mounting

Ambient temperature range	-20...+50 °C
Temperature range at storage	-20...+80 °C
Type of connection	Push-in clamp
Type of protection	IP20
Dimmable	No

Lifespan

Lifespan L70/B50 at 25 °C	100000 h
Lifespan L80/B10 at 25 °C	70000 h
Lifespan L80/B50 at 25 °C	70000 h
Lifespan L90/B10 at 25 °C	35000 h
Number of switching cycles	25000

Certificates & Standards

Standards	CE / CB / ENEC / TÜV SÜD / UKCA / EAC
-----------	---------------------------------------

Additional product data

Product remark	Available from September 2025
----------------	-------------------------------

Safety advice

– All electrical connections must be made by a qualified person.

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	User instruction G11244437
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	Safety Insert G11218810
	Legal information	Legal Insert G11244392
	Legal information	LSI insert G11244301
	Declarations of conformity	LN INV
	Declarations of conformity UKCA	LN INV
Photometric and lighting design files		Document name
	IES file (IES)	LISOEV 1465X31 28 23W 930 S130 LEDV 466mA
	LDT file (Eulumdat)	LISOEV 1465X31 28 23W 930 S130 LEDV 466mA
	Light distribution curve type cone	LISOEV 1465X31 28 23W 930 S130 LEDV 466mA
	Light distribution curve type polar	LISOEV 1465X31 28 23W 930 S130 LEDV 466mA
CAD/BIM files		Document name
	CAD STEP 3D	LN INDV INDIRECT G2 LISOEV 1500

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854285059	Folding box 1	36 mm x 1,472 mm x 17 mm	417.00 g	0.90 dm ³
4099854285066	Shipping box 10	1,484 mm x 184 mm x 67 mm	4270.00 g	18.29 dm ³
4099854285073	Shipping box 20	1,504 mm x 204 mm x 158 mm	9450.00 g	48.48 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

[illegible]

EAN	DIRECT		INDIRECT		EAN	LINEAR INDI-EDISK
	EAN	LOREV	EAN	LOREV		
430905402009	LOREV 107-29-45 100 MM 300719-0A	430905401678	LOREV 100021-20 100 MM 300719-0A	430905402009	608850246702	D 100P X 4MM 90 PS BK
					608850246703	D 100P X 4MM 90 PS BK
					608850246704	D 100P X 4MM 90 CA BK
					608850246705	D 100P X 4MM 90 CA BK
					608850246706	D 100P X 4MM 90 CA BK
430905402006	LOREV 107-29-45 100 MM 300719-0A	430905401678	LOREV 100021-20 100 MM 300719-0A	430905402006	608850246640	D 100P X 4MM 90 CA BK
					608850246641	D 100P X 4MM 90 PS BK
					608850246642	D 100P X 4MM 90 PS BK
					608850246643	D 100P X 4MM 90 PS BK
					608850246644	D 100P X 4MM 90 PS BK
430905402010	LOREV 100020-15 100 MM 300719-0A	430905401678	LOREV 100021-20 100 MM 300719-0A	430905402010	608850246645	D 100P X 4MM 90 PS BK
					608850246646	D 100P X 4MM 90 PS BK
					608850246647	D 100P X 4MM 90 PS BK
					608850246648	D 100P X 4MM 90 PS BK
					608850246649	D 100P X 4MM 90 PS BK
430905402110	LOREV 100020-15 100 MM 300719-0A	430905401678	LOREV 100021-20 100 MM 300719-0A	430905402110	608850246650	D 100P X 4MM 90 PS BK
					608850246651	D 100P X 4MM 90 PS BK
					608850246652	D 100P X 4MM 90 PS BK
					608850246653	D 100P X 4MM 90 PS BK
					608850246654	D 100P X 4MM 90 PS BK
430905402108	LOREV 100020-15 100 MM 300719-0A	430905401678	LOREV 100021-20 100 MM 300719-0A	430905402108	608850246655	D 100P X 4MM 90 PS BK
					608850246656	D 100P X 4MM 90 PS BK
					608850246657	D 100P X 4MM 90 PS BK
					608850246658	D 100P X 4MM 90 PS BK
					608850246659	D 100P X 4MM 90 PS BK
430905402203	LOREV 107-29-45 100 MM 300719-0A	430905401678	LOREV 100021-20 100 MM 300719-0A	430905402203	608850246660	D 100P X 4MM 90 PS BK
					608850246661	D 100P X 4MM 90 PS BK
					608850246662	D 100P X 4MM 90 PS BK
					608850246663	D 100P X 4MM 90 PS BK
					608850246664	D 100P X 4MM 90 PS BK
430905402204	LOREV 107-29-45 100 MM 300719-0A	430905401678	LOREV 100021-20 100 MM 300719-0A	430905402204	608850246665	D 100P X 4MM 90 PS BK
					608850246666	D 100P X 4MM 90 PS BK
					608850246667	D 100P X 4MM 90 PS BK
					608850246668	D 100P X 4MM 90 PS BK
					608850246669	D 100P X 4MM 90 PS BK

References / Links

– For Guarantee see www.ledvance.com/guarantee

DISCLAIMER

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.