

PRODUCT DATASHEET

LISOEV 1200x31 20 15W 930 S130

LINEAR INDIVIDUAL LIGHT SOURCES INDIRECT | Upgrade or replacement light source unit for indirect, diffuse light distribution



Areas of application

- Direct replacement for luminaires with fluorescent lamps
- Offices, education, public buildings

Product benefits

- Easy upgradeability of light source and driver (EVERLOOP design)
- Easy installation, no tools required for connection
- Homogenous light distribution and reduced glare ($UGR \leq 19$) thanks to IndiviLED® optics
- High performance with CRI90

Product features

- Indirect, diffuse light distribution
- Lifetime (L80/B10): 70,000 h (at 25 °C)
- Beam angle: 90°


TECHNICAL DATA

Electrical data


Nominal wattage	15.00 W
Nominal voltage	45 V
Nominal current	300.000 mA

Photometrical data

Luminous flux	2000 lm
Luminous efficacy	133 lm/W
Color temperature	3000 K
Light color (designation)	Warm White
Color rendering index Ra	≥90
Standard deviation of color matching	3 sdc _m
Flickering metric (Pst LM)	≤1
Stroboscope effect metric (SVM)	≤0.4
Photobiological safety group acc. to EN62778	RG1
Beam angle	130 °
UGR	19

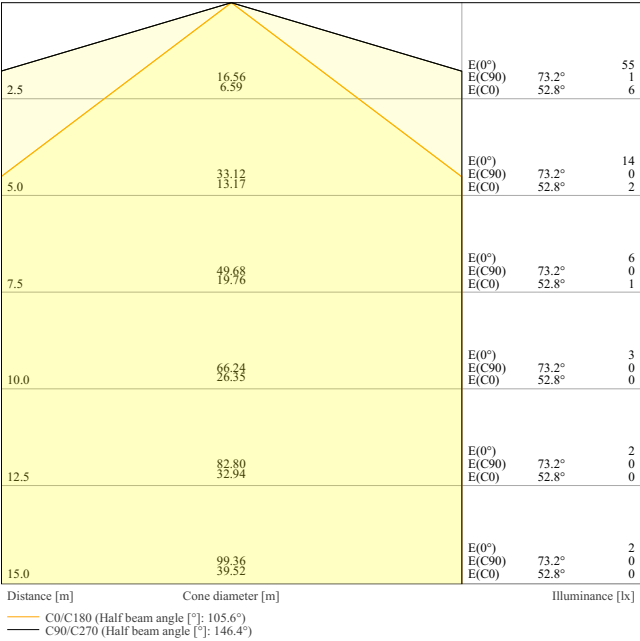

LISOEV 1200X31 20 15W 930 S130 LEDV 300mA

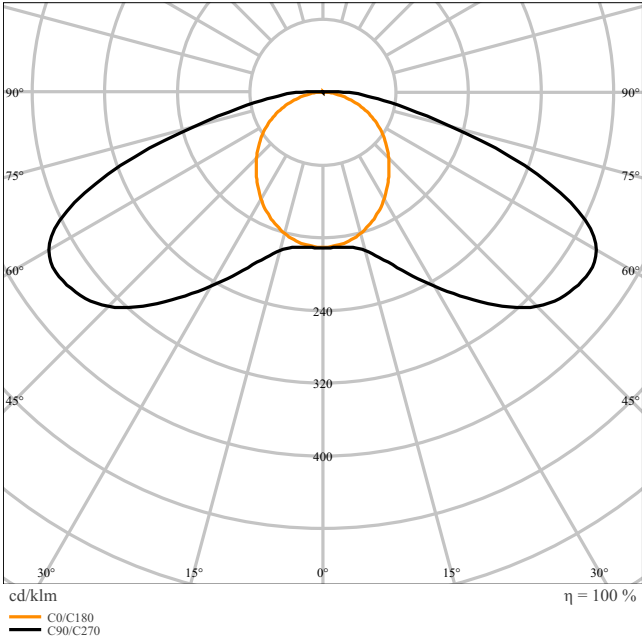

LISOEV 1200X31 20 15W 930 S130 LEDV 300mA

Dimensions & Weight

Length	1200.00 mm
--------	------------

Width	31.00 mm
Height	11.00 mm
Product weight	273.00 g
Cable length	100.000



1 2m INDIRECT LED MODULE

Materials & Colors

Product color	Grey
Housing color	Grey

Application & Mounting

Ambient temperature range	-20...+50 °C
Temperature range at storage	-20...+80 °C
Type of connection	Push-in clamp
Type of protection	IP20
Dimmable	No

Lifespan

Lifespan L70/B50 at 25 °C	100000 h
Lifespan L80/B10 at 25 °C	70000 h
Lifespan L80/B50 at 25 °C	70000 h
Lifespan L90/B10 at 25 °C	35000 h
Number of switching cycles	25000

Certificates & Standards

Standards	CE / CB / ENEC / TÜV SÜD / UKCA / EAC
-----------	---------------------------------------

Additional product data

Product remark	Available from September 2025
----------------	-------------------------------

Safety advice

– All electrical connections must be made by a qualified person.

DOWNLOAD DATA

Documents and certificates		Document name
	User instruction / safety instructions	User instruction G11244437
	Legal information	Informationstext 18 Abs 4 ElektroG
	Legal information	Safety Insert G11218810
	Legal information	Legal Insert G11244392
	Legal information	LSI insert G11244301
	Declarations of conformity	LN INV
	Declarations of conformity UKCA	LN INV
Photometric and lighting design files		Document name
	IES file (IES)	LISOEV 1200X31 20 15W 930 S130 LEDV 300mA
	LDT file (Eulumdat)	LISOEV 1200X31 20 15W 930 S130 LEDV 300mA
	Light distribution curve type cone	LISOEV 1200X31 20 15W 930 S130 LEDV 300mA
	Light distribution curve type polar	LISOEV 1200X31 20 15W 930 S130 LEDV 300mA
CAD/BIM files		Document name
	CAD STEP 3D	LN INDV INDIRECT G2 LISOEV 1200

LOGISTICAL DATA

Product code	Packaging unit (Pieces/Unit)	Dimensions (length x width x height)	Gross weight	Volume
4099854284878	Folding box 1	36 mm x 1,270 mm x 17 mm	293.00 g	0.78 dm ³
4099854284885	Shipping box 10	1,219 mm x 184 mm x 49 mm	2963.00 g	10.99 dm ³
4099854284892	Shipping box 20	1,239 mm x 204 mm x 122 mm	6646.00 g	30.84 dm ³

The mentioned product code describes the smallest quantity unit which can be ordered. One shipping unit can contain one or more single products. When placing an order, for the quantity please enter single or multiples of a shipping unit.

[illegible]

DIRECT		INDIRECT			
EAN	LSOEY	EAN	LSOEY	EAN	LINEAR IN-HOUSE P&L
400005402009	USOEY 1070-20 44 400 100 350131-30	400005404703	USOEY 1000-20 20 100 100 3510	400005404703	C 100P 100 350 P&L BK
				400005404703	C 100P 100 350 P&L BK
				400005404703	C 100P 100 350 P&L BK
				400005404703	C 100P 100 350 P&L BK
				400005404703	C 100P 100 350 P&L BK
400005402009	USOEY 1070-20 44 400 100 350131-30	400005404703	USOEY 1000-20 20 100 100 3510	400005404703	C 100P 100 350 P&L BK
				400005404703	C 100P 100 350 P&L BK
				400005404703	C 100P 100 350 P&L BK
				400005404703	C 100P 100 350 P&L BK
				400005404703	C 100P 100 350 P&L BK
400005402010	USOEY 1000-10 10 100 100 350013-30	400005404005	USOEY 1000-21 21 100 100 3510	400005404005	C 100P 100 350 P&L BK
				400005404005	C 100P 100 350 P&L BK
				400005404005	C 100P 100 350 P&L BK
				400005404005	C 100P 100 350 P&L BK
				400005404005	C 100P 100 350 P&L BK
400005402010	USOEY 1000-10 10 100 100 350013-30	400005404005	USOEY 1000-21 21 100 100 3510	400005404005	C 100P 100 350 P&L BK
				400005404005	C 100P 100 350 P&L BK
				400005404005	C 100P 100 350 P&L BK
				400005404005	C 100P 100 350 P&L BK
				400005404005	C 100P 100 350 P&L BK
400005402010	USOEY 1070-20 44 400 100 350131-30	400005404703	USOEY 1000-20 20 100 100 3510	400005404703	C 100P 100 350 P&L BK
				400005404703	C 100P 100 350 P&L BK
				400005404703	C 100P 100 350 P&L BK
				400005404703	C 100P 100 350 P&L BK
				400005404703	C 100P 100 350 P&L BK

– For Guarantee see www.ledvance.com/guarantee

Subject to change without notice. Errors and omission excepted. Always make sure to use the most recent release.